


Actuator

AMKS1

AMKS1 is an in-line linear actuator characterized by its miniature size and waterproof. There are four stroke options and different speed options, with a maximum force (push/pull) of 80N. There are two function options in this model, you can choose with travel limit switch or with potentiometer positioning info.

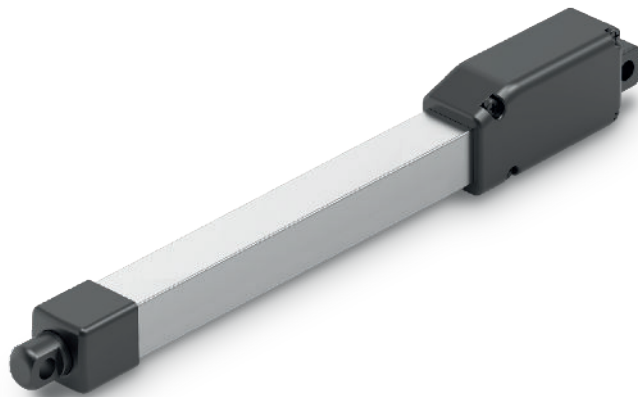

Features

Main applications: Industry, Furniture, DIY application

Standard features:

- Input voltage: 12V DC
- Max. load: 80N (Push/Pull)
- Max. static load: 40N
- Max. speed at no load: 19.0mm/sec (typical value)
- Speed at max load: 6.3mm/sec (typical value @80N Loaded)
- Stroke: 10 / 30 / 50 / 100 mm
- Noise level: <55dB
- IP level: IP66/IP69K (static; non-action)
- Material: Aluminum extension and inner tube, plastic case.
- Duty cycle: 20%
- Operating ambient temperature: -10°C ~ +50°C


Options

- AMKS1-L version: With travel limit switch, which cuts off power and stop the motor automatically.
- AMKS1-P version: With potentiometer positioning info, so that controller can detect the stroke position of the actuator at any time. And it is an absolute position information, which will not deviate due to power failure.


Performance Data

Model No.	Push/Pull Max. load (N)	Self-locking ability (N)	Typical speed (mm/s)		Typical current (A) @12V DC	
			No load	Full load	No load	Full load
AMKS1-X-12-E-XXX-0XX	42	21	19.0	12.2	0.14	0.27
AMKS1-X-12-F-XXX-0XX	80	40	9.5	6.3	0.12	0.22

Speed VS. Load

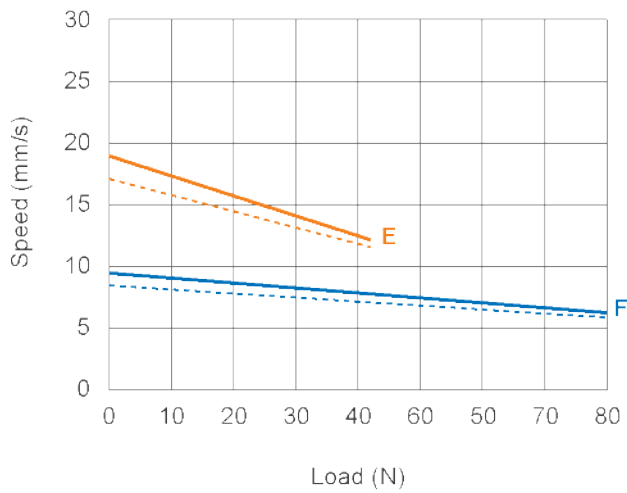

Current VS. Load

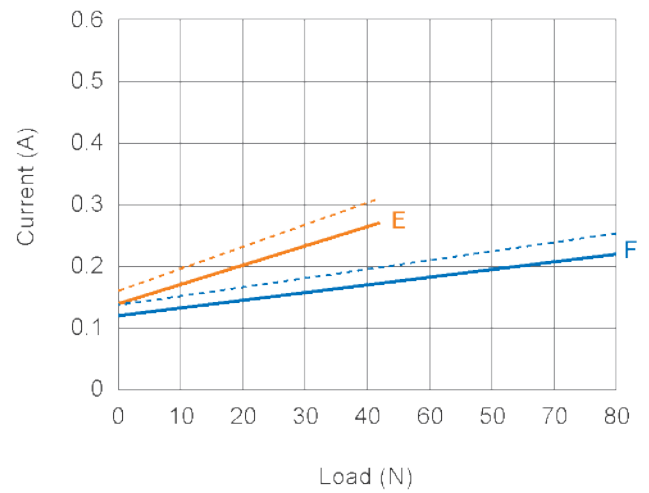

Dimensions

Installation dimension:


- Extended length = Retracted length (A) + Stroke (S)
- Minimum retracted length (A) of various options

Version	Stroke (S)			
	10	30	50	100
AMKS1-L	67	87	107	157
AMKS1-P	N/A	87	107	157


(Tolerance: $\pm 1\text{mm}$)

Drawing

- AMKS1-L

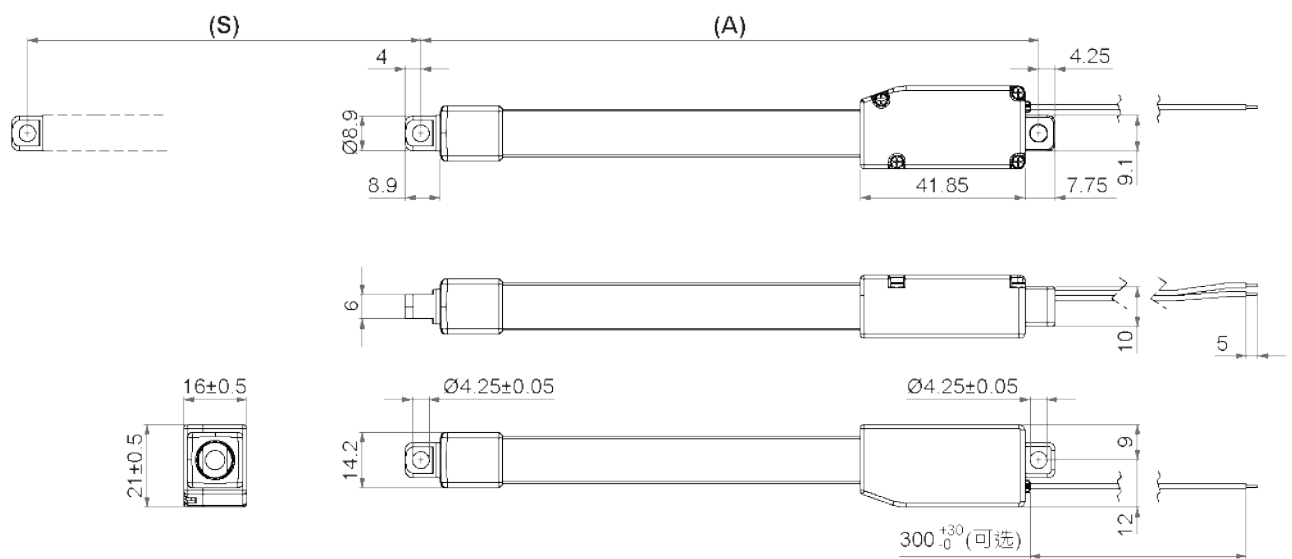

- AMKS1-P (only one size)

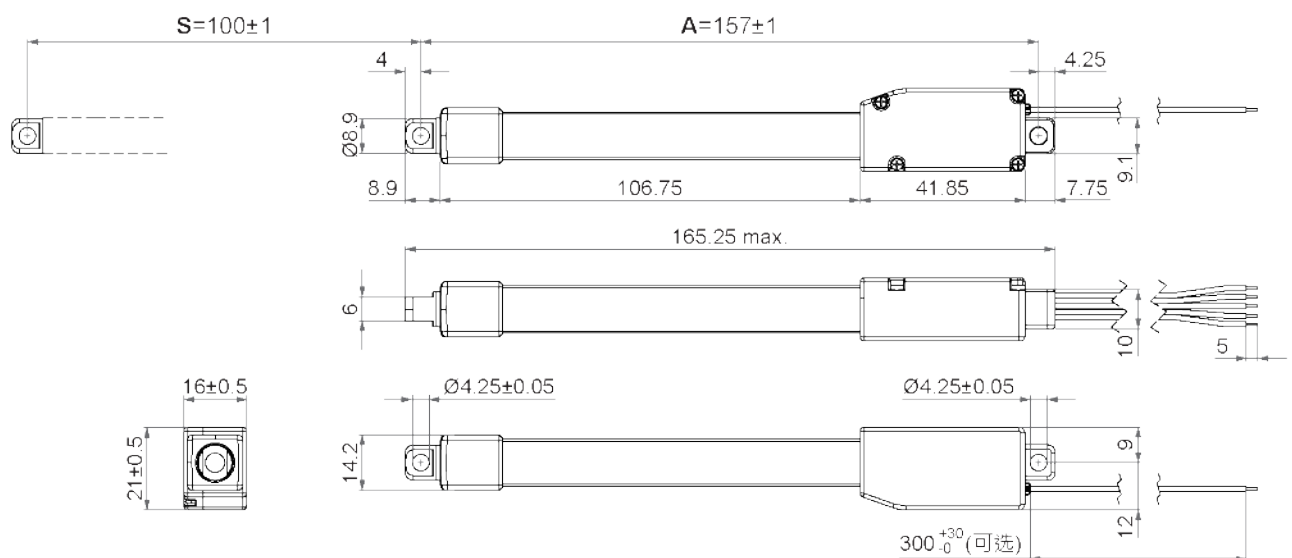


Unit: mm

Wiring with Flying Leads

- AMKS1-P (with limit switches)

	Wire color	Definition	Descriptions
Power wires	Red	DC Power	Connect red wire to "Vdc +" & black wire to "Vdc -" of DC power to extend the actuator. Switch the polarity of DC input to retract it.
	Black		

- AMKS1-P (with potentiometer positioning info)

	Wire color	Definition	Descriptions								
Power wires	Red	DC power	Connect red wire to "Vdc +" & black wire to "Vdc -" of DC power to extend the actuator. Switch the polarity of DC input to retract it.								
	Black										
Signal wires	Yellow	Vin	Input any stable high reference voltage <30V								
	Blue	POT output	1. Potentiometer specifications: There are different total resistance according to the stroke options (as table below). <table><tr><th>Stroke option</th><th>* Max. resistance</th></tr><tr><td>30 mm</td><td>3KΩ±40%</td></tr><tr><td>50 mm</td><td>6KΩ±40%</td></tr><tr><td>100 mm</td><td>11KΩ±40%</td></tr></table> * Remarks: It is the resistance value between the blue and the white wires when the actuator is extended to its longest position. 2. Output voltage: As the actuator extends, the voltage (resistance) measurement between the blue and white wires increases linearly. Conversely, decrement when retracting.  3. When using for the first time (or when the actuator is replaced), after correctly connecting the wires, measure the output voltage at the beginning and end of the actuator stroke from the blue line (more sampling points can be added in the middle) to calculate the linear conversion formula between the POT output voltage and the stroke position. By building the formula into the control system's program parameters, the measured voltage can be converted into stroke position in real time.	Stroke option	* Max. resistance	30 mm	3KΩ±40%	50 mm	6KΩ±40%	100 mm	11KΩ±40%
	Stroke option	* Max. resistance									
	30 mm	3KΩ±40%									
50 mm	6KΩ±40%										
100 mm	11KΩ±40%										
	White	GND	Any stable low reference voltage (e.g. grounding)								

Ordering Key

AMKS1- L - 12 - E - 030 - 0 0 3

Version	L: Preset power switches for stroke end limits P: With potentiometer positioning info
Input voltage	12: 12V DC
Performance	E, F (refer to p.2 Performance Data)
Stroke	010: 10mm 030: 30mm 050: 50mm 100: 100mm
Reserved	0
Reserved	0
Cable length	0: 300mm straight 3: 900mm straight

Tel: +31(0)85 0668800
Mail: verkoop@aamotionandcontrol.nl
www.aamotionandcontrol.nl



Terms of Use

The user is responsible for application suitability of A&A Motion and Control products. As ongoing improvement process continues, products listed on the A&A Motion and Control website are subject to change without prior notice. A&A Motion and Control reserves the right to terminate the sales or remove any product displayed on the website, or listed in its catalogues.